

Genoemde maatvoeringen zijn binnenmaten


Maximale Kantlengte in meters		V = gr / B= Binnenmaat															min. afstand tussen zet lijn & uitsparing	kleinste inwendige maat bij meerdere zettingen
S235JR (st.37)	V	B	DIKTE															
			0,5	1	1,5	2	3	4	5	6	8	10	12	15				
8	7		4,0	4,0	4,0											7 mm	10	
12	8			4,0	4,0	4,0										8 mm	10	
16	12				4,0	4,0	4,0									12 mm	18	
24	16					4,0	4,0	4,0								14 mm	18	
30	20						4,0	4,0	4,0	2,8						19 mm	20	
40	26							4,0	4,0	3,8	2,1					25 mm	29	
60	39								4,0	4,0	3,1	2,0				33 mm	44	
80	52									4,0	2,7	1,9	1,2			45 mm	58	

Maximale Kantlengte in meters		RVS															min. afstand tussen zet lijn & uitsparing	kleinste inwendige maat bij meerdere zettingen
V	B	DIKTE																
		0,5	1	1,5	2	3	4	5	6	8	10	12	15					
8	7	4,0	4,0	4,0											7 mm	10		
12	8		4,0	4,0	4,0										8 mm	10		
16	12			4,0	4,0	4,0									12 mm	18		
24	16				4,0	4,0	3,4								14 mm	18		
30	20					4,0	4,0	2,7	1,9						19 mm	20		
40	26						4,0	3,0	2,5	1,4					25 mm	29		
60	39							4,0	3,7	2,1	1,3				33 mm	44		
80	52								4,0	2,8	1,8	1,2	0,8		45 mm	58		

Maximale Kantlengte in meters		ALUMINIUM															min. afstand tussen zet lijn & uitsparing	kleinste inwendige maat bij meerdere zettingen
V	B	DIKTE																
		0,5	1	1,5	2	3	4	5	6	8	10	12	15					
8	7	4,0	4,0	4,0											7 mm	10		
12	8		4,0	4,0	4,0										8 mm	10		
16	12			4,0	4,0	4,0									12 mm	18		
24	16				4,0	4,0	4,0								14 mm	18		
30	20					4,0	4,0	4,0	4,0						19 mm	20		
40	26						4,0	4,0	4,0	3,8					25 mm	29		
60	39							4,0	4,0	4,0	3,5	2,5			34 mm	44		
80	52								4,0	4,0	4,0	3,2	2,0		45 mm	58		

Maximale Kantlengte in meters		overleg met DeCromvoirtse															min. afstand tussen zet lijn & uitsparing	kleinste inwendige maat bij meerdere zettingen
S355J2-S355MC S420MC (st.52)		DIKTE																
V	B	0,5	1	1,5	2	3	4	5	6	8	10	12	15					
8	10	4,0	4,0	4,0											7 mm	10		
12	10		4,0	4,0	4,0										8 mm	10		
16	14			4,0	4,0	4,0									12 mm	18		
24	18				4,0	4,0	3,4								14 mm	18		
30	22					4,0	4,0	2,7	1,9						19 mm	20		
40	28						4,0	3,0	2,5	1,4					25 mm	29		
60	40							4,0	3,7	2,1	1,3				34 mm	44		
80	52								4,0	2,8	1,8	1,2	0,8		45 mm	58		

Maximale kantlengte: 4270mm
Tussen de wangen: 3850mm
V groef: 8 x plaatdikte
Diepte wang: 400mm

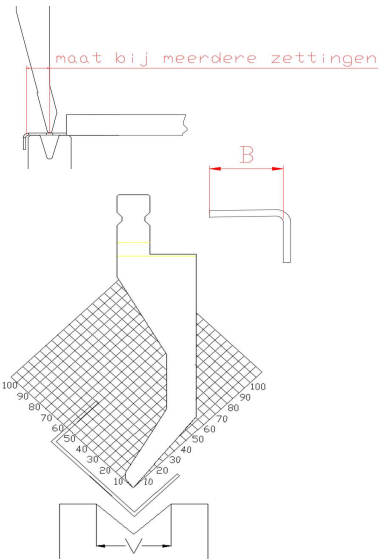

Maximaal te zetten bakhooft: 160mm
Maximale baklengte: 1500mm

